

# EXHIBIT C

(12) **United States Patent  
Burke**(10) **Patent No.:** **US 9,665,705 B2**(45) **Date of Patent:** **\*May 30, 2017**(54) **REMOTE ENTRY SYSTEM****63/0861** (2013.01); **H04W 12/08** (2013.01);**H04W 84/12** (2013.01); **H04W 84/18**

(2013.01)

(71) Applicant: **Securicom (NSW) Pty. Ltd.**, Ramsgate,  
NSW (AU)(72) Inventor: **Christopher John Burke**, Ramsgate  
(AU)(73) Assignee: **SECURICOM (NSW) PTY LTD**,  
Ramsgate (AU)(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.This patent is subject to a terminal dis-  
claimer.(58) **Field of Classification Search**CPC ..... **G06F 21/32**

See application file for complete search history.

(56) **References Cited****U.S. PATENT DOCUMENTS**5,109,428 A \* 4/1992 Igaki ..... **A61B 5/1172**  
356/715,933,515 A \* 8/1999 Pu ..... **G06K 9/00006**  
340/5.537,152,045 B2 \* 12/2006 Hoffman ..... **G06F 21/32**  
235/379(21) Appl. No.: **15/000,818**(22) Filed: **Jan. 19, 2016**(65) **Prior Publication Data**

US 2016/0132672 A1 May 12, 2016

**Related U.S. Application Data**(63) Continuation of application No. 13/572,166, filed on  
Aug. 10, 2012, now Pat. No. 9,269,208, which is a  
(Continued)(30) **Foreign Application Priority Data**

Aug. 13, 2003 (AU) ..... 2003904317

(51) **Int. Cl.****H04L 29/06** (2006.01)**G06F 21/32** (2013.01)**G06F 21/35** (2013.01)**G07C 9/00** (2006.01)**H04W 12/08** (2009.01)


(Continued)

(52) **U.S. Cl.**CPC ..... **G06F 21/32** (2013.01); **G06F 21/35**  
(2013.01); **G07C 9/00158** (2013.01); **H04L****OTHER PUBLICATIONS**Klosterman, Andrew J., and Gregory R. Ganger. "Secure continuous  
biometric-enhanced authentication." (2000).\*

\* cited by examiner

*Primary Examiner* — Shawnoy Rahaman(74) *Attorney, Agent, or Firm* — Brinks Gilson & Lione(57) **ABSTRACT**

A system is disclosed for providing secure access to a controlled item, the system comprising a database of biometric signatures, a transmitter subsystem comprising a biometric sensor for receiving a biometric signal, means for matching the biometric signal against members of the database of biometric signatures to thereby output an accessibility attribute, and means for emitting a secure access signal conveying information dependent upon said accessibility attribute, wherein the secure access signal comprises one of at least a rolling code, an encrypted Bluetooth™ protocol, and a Wi-Fi™ protocol, and a receiver sub-system comprising means for receiving the transmitted secure access signal and means for providing conditional access to the controlled item dependent upon said information.

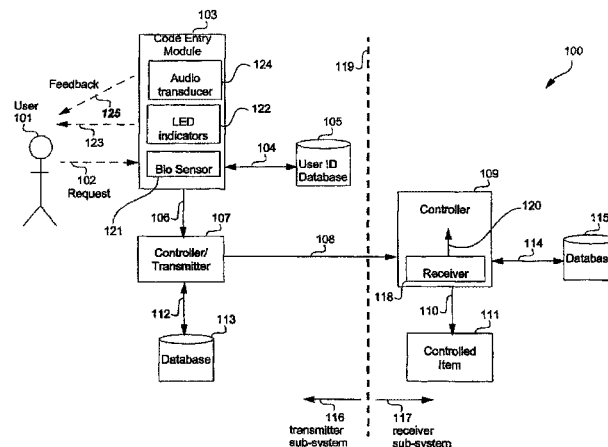**17 Claims, 10 Drawing Sheets**

**US 9,665,705 B2**

Page 2

---

**Related U.S. Application Data**

continuation of application No. 10/568,207, filed as  
application No. PCT/AU2004/001083 on Aug. 13,  
2004, now Pat. No. 8,266,442.

(51) **Int. Cl.**

*H04W 84/12* (2009.01)

*H04W 84/18* (2009.01)

400

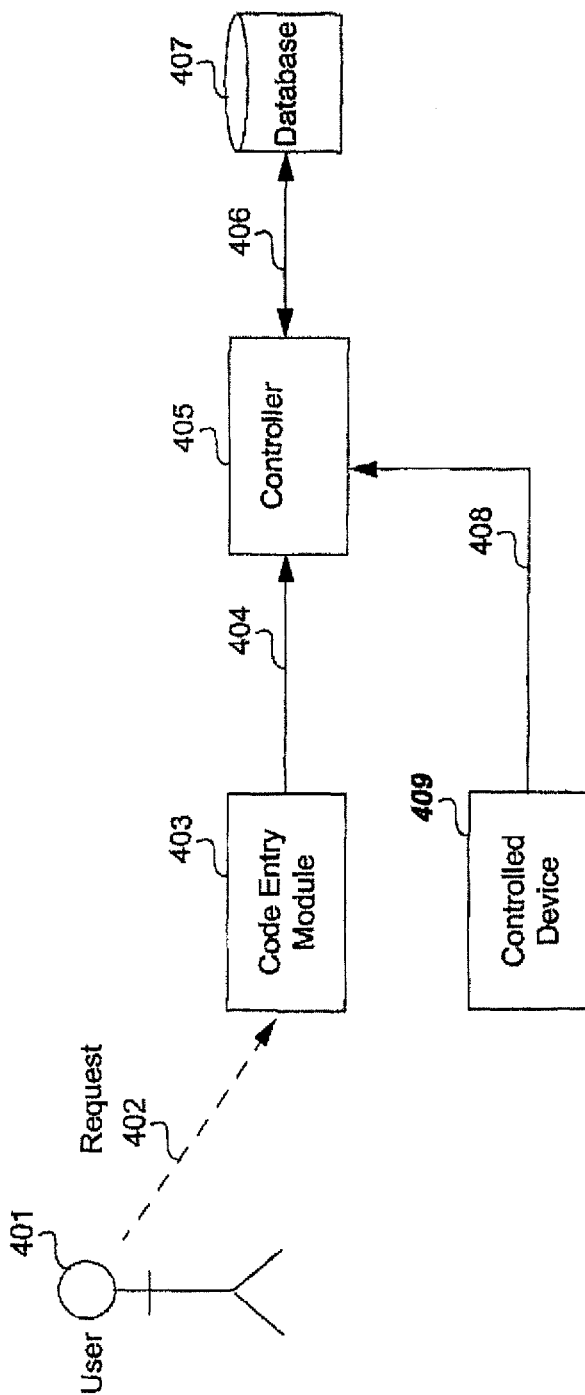


Fig. 1  
(prior art)

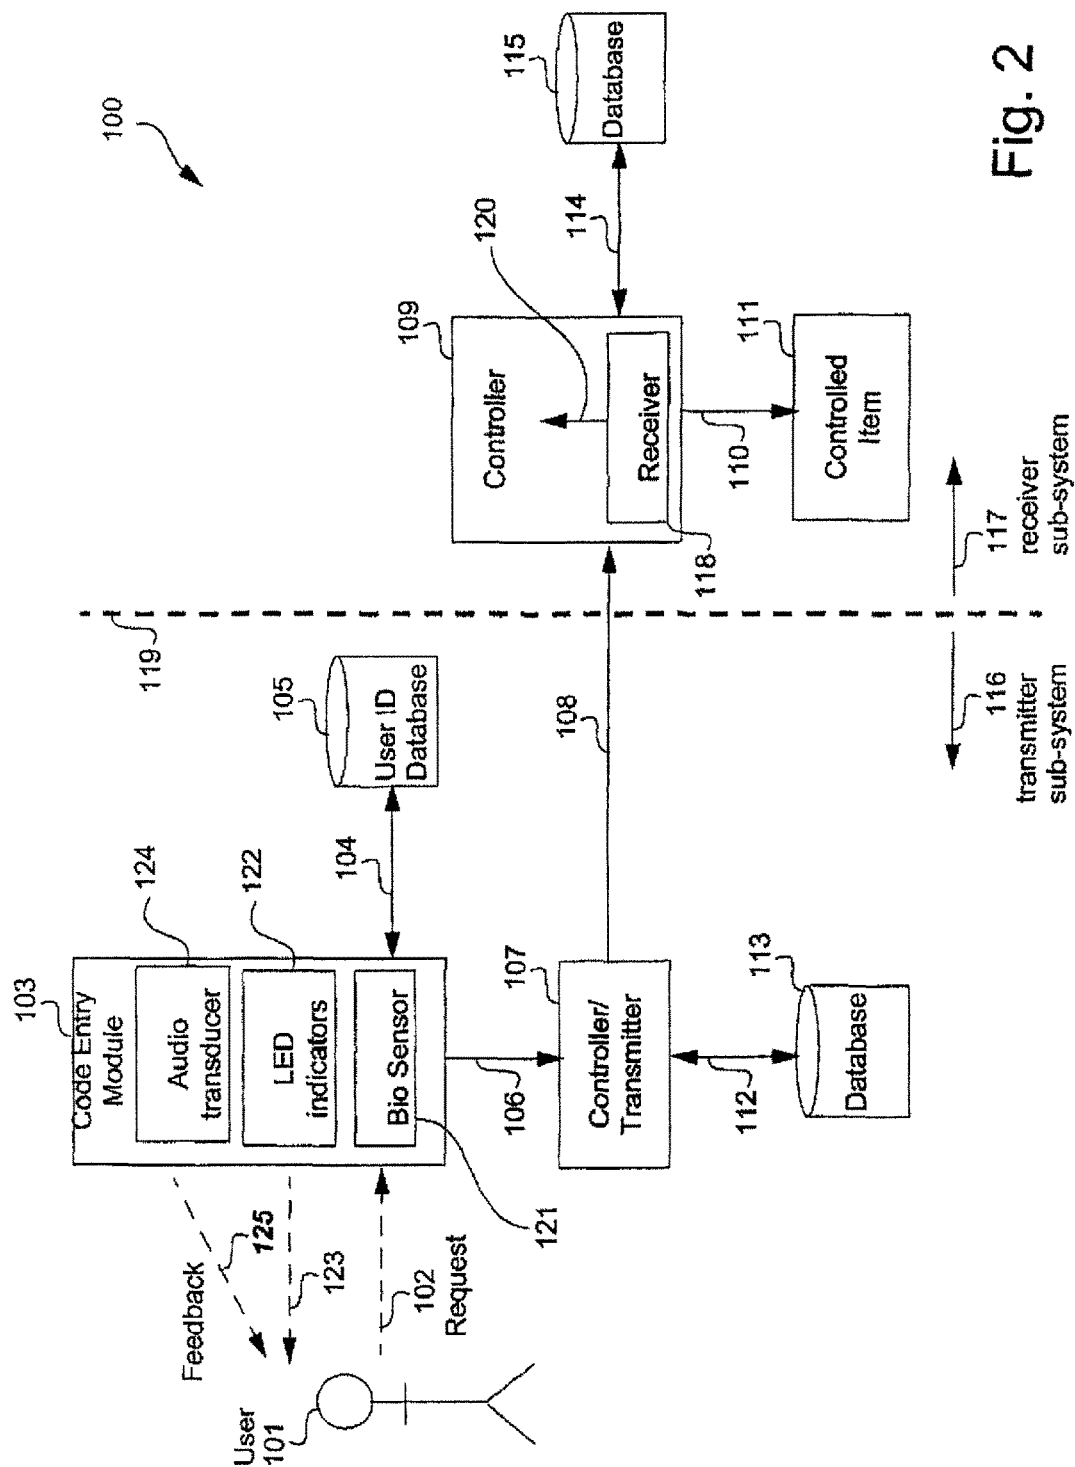


Fig. 2

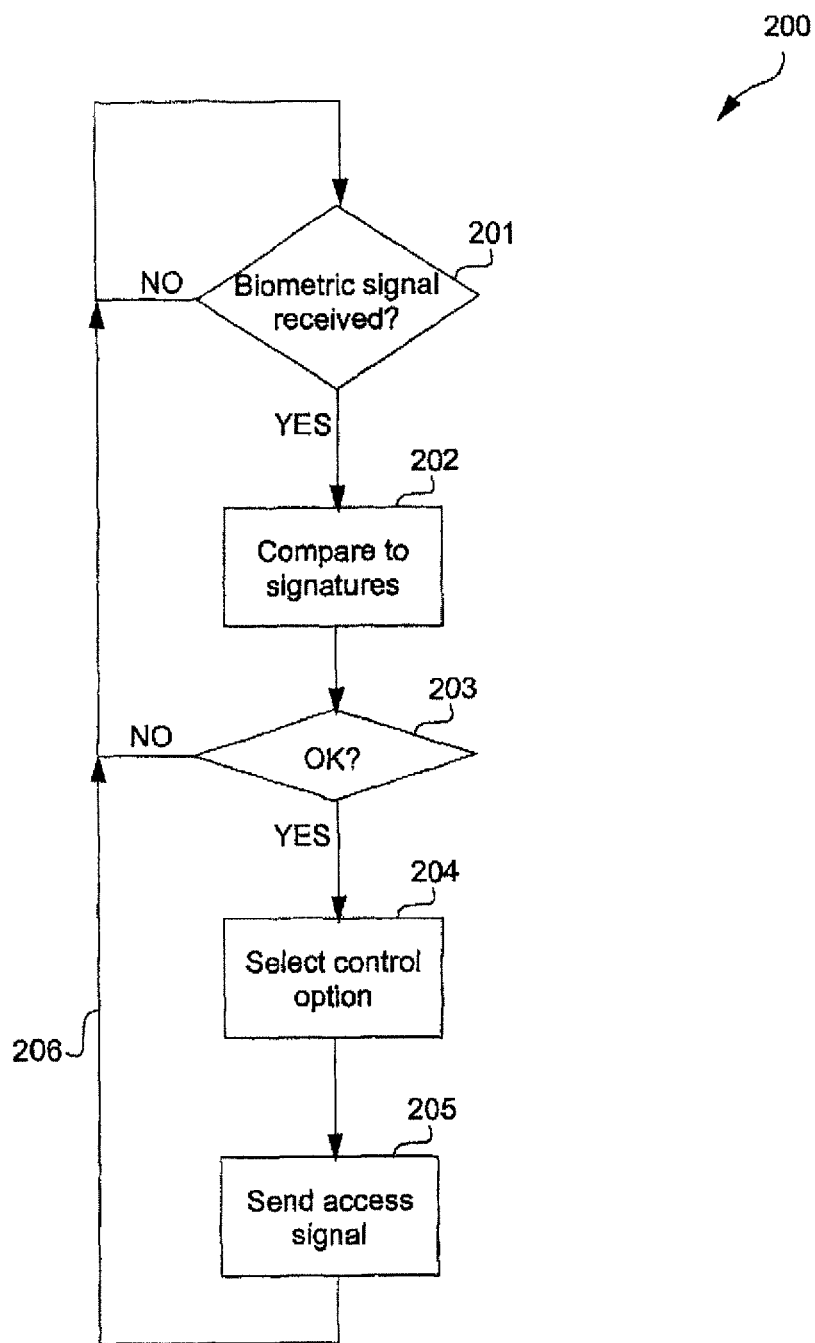


Fig. 3

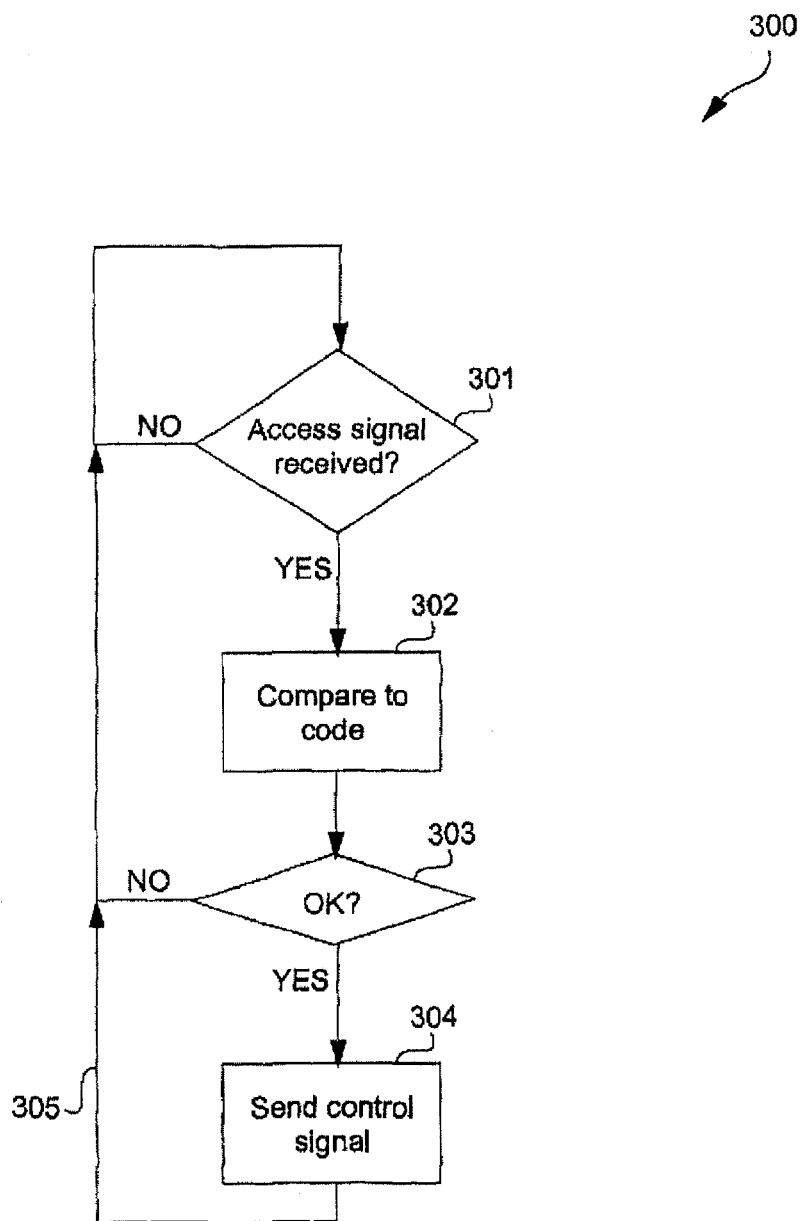


Fig. 4

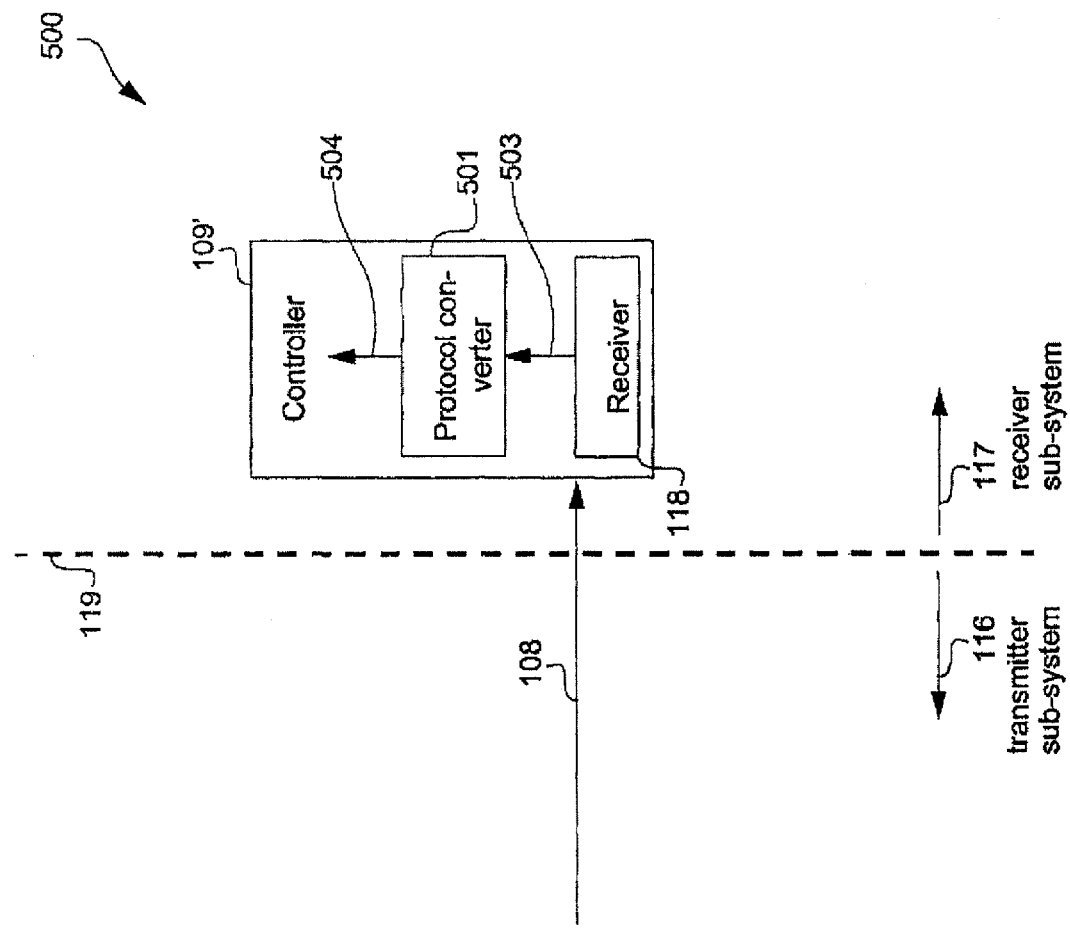


Fig. 5



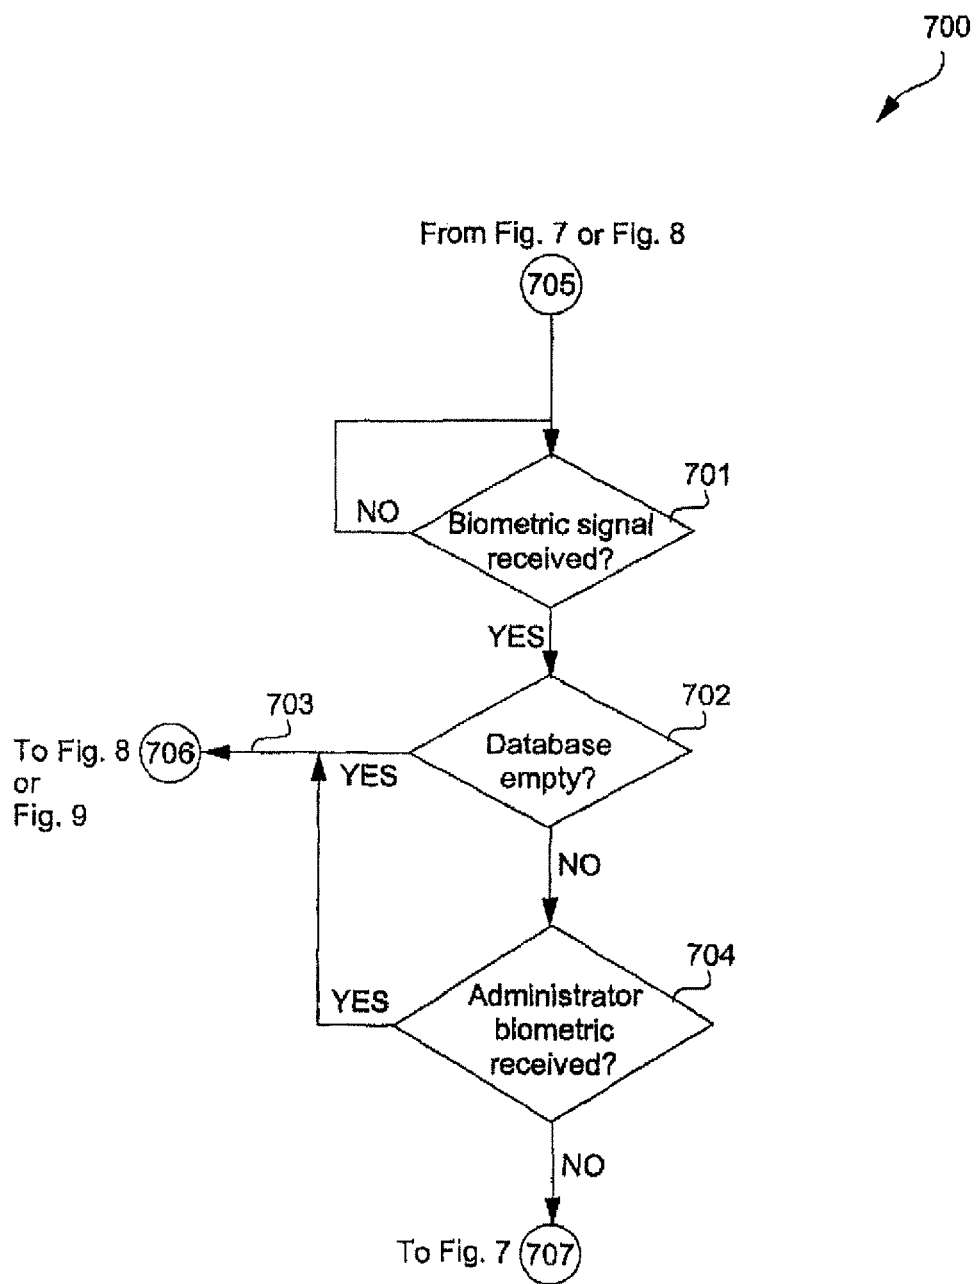


Fig. 6

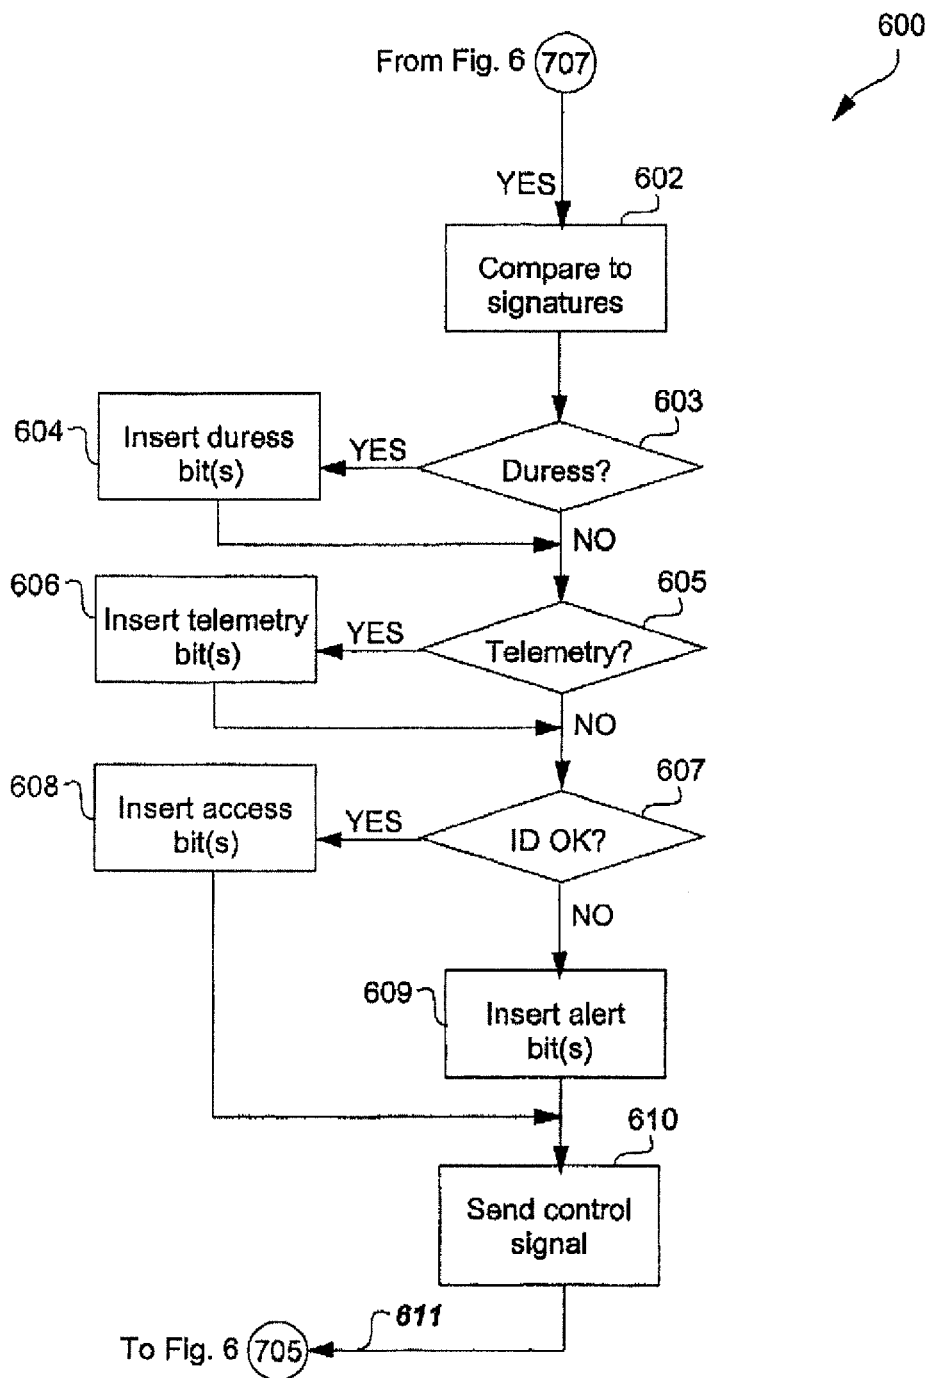


Fig. 7

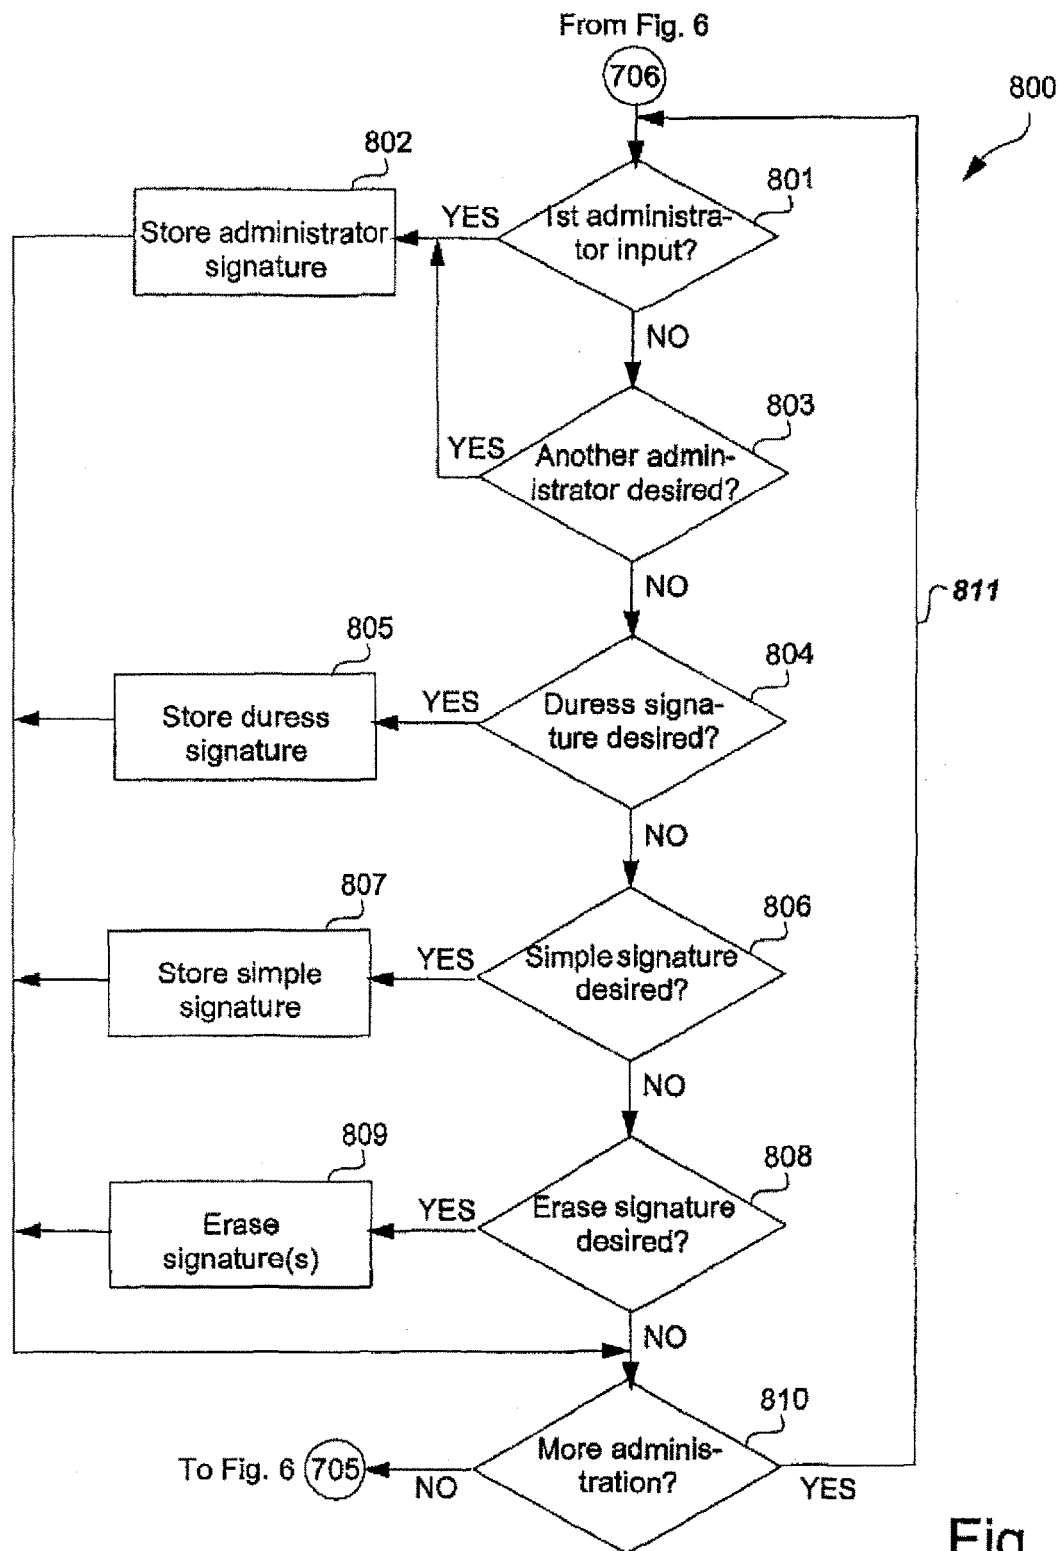


Fig. 8

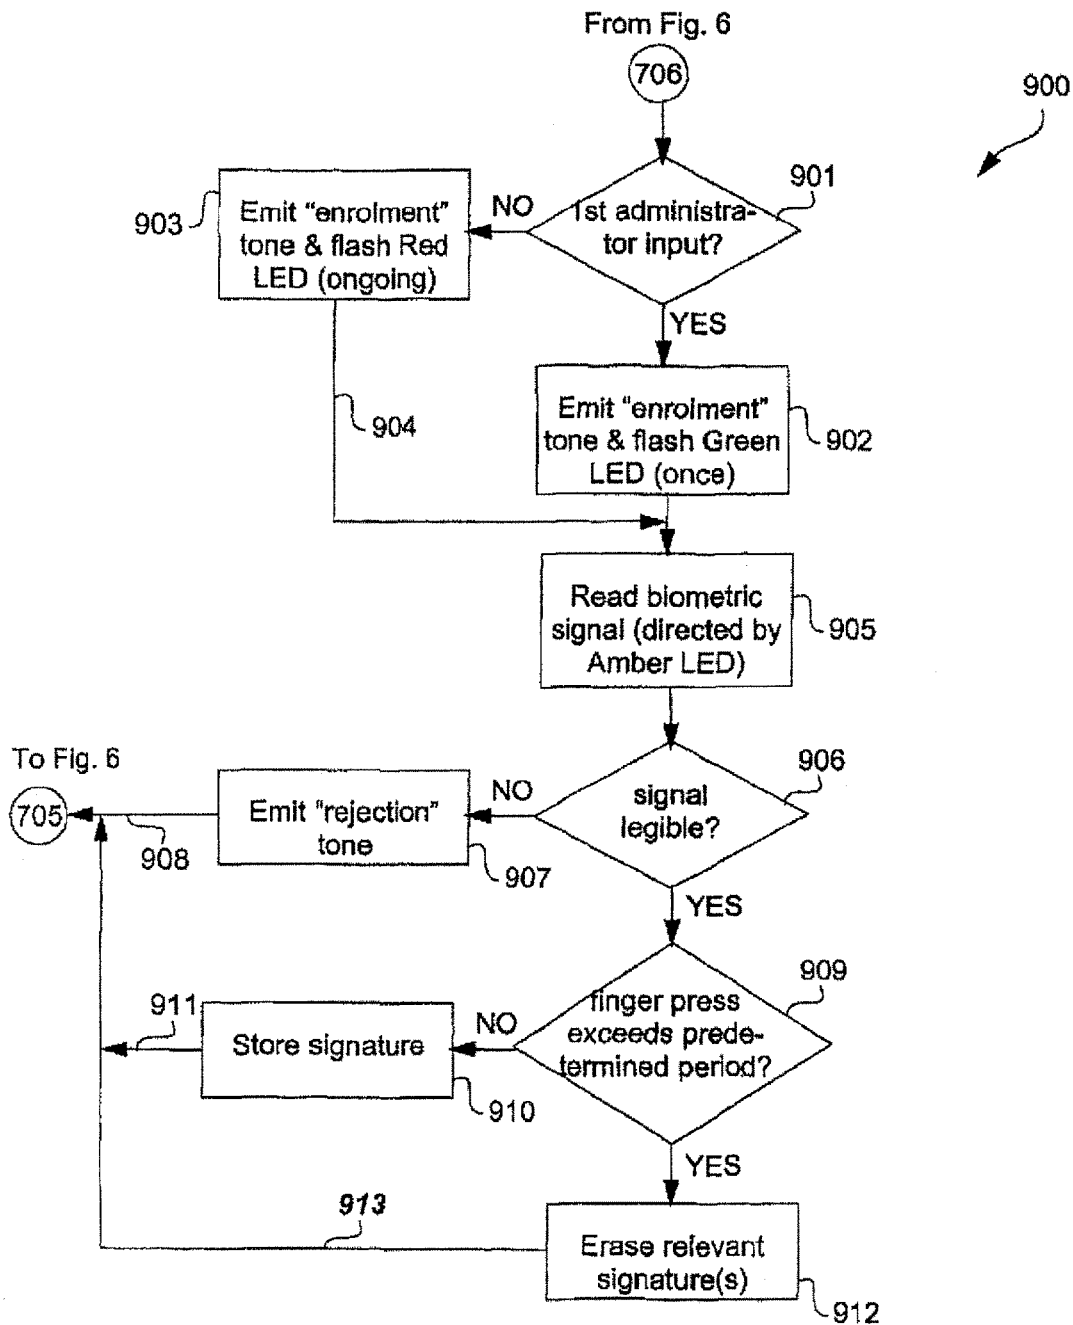


Fig. 9

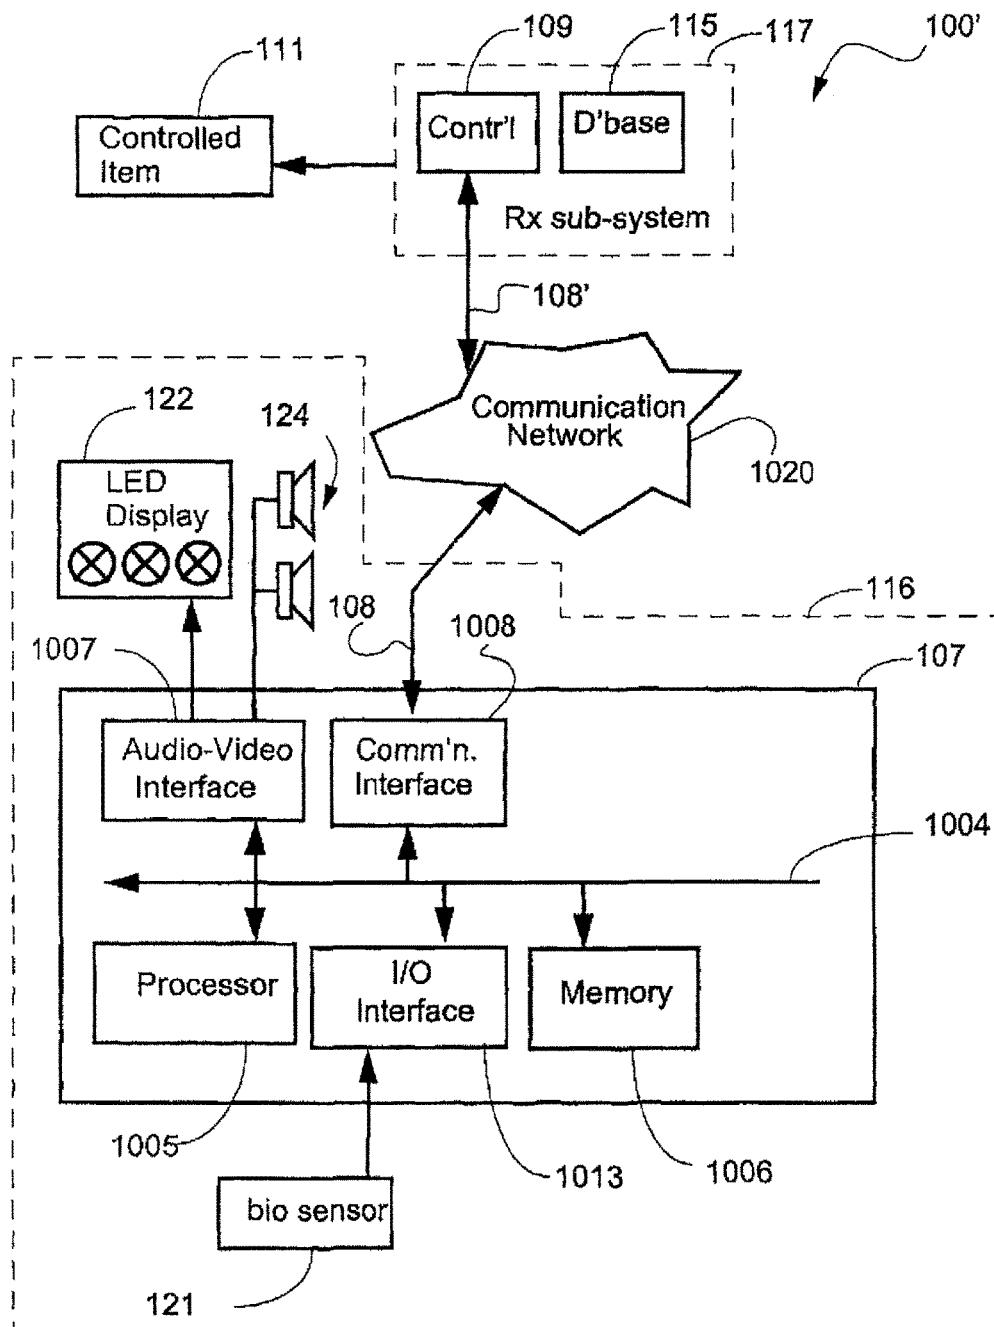


Fig. 10

US 9,665,705 B2

1

**REMOTE ENTRY SYSTEM****CROSS-REFERENCE TO RELATED APPLICATIONS**

This application is a continuation patent application of U.S. Non-Provisional application Ser. No. 10/568,207 for REMOTE ENTRY SYSTEM, filed Jun. 4, 2008, the disclosure of which is incorporated by reference in its entirety.

**FIELD OF THE INVENTION**

The present invention relates to secure access systems and, in particular, to systems using wireless transmission of security code information.

**BACKGROUND**

FIG. 1 shows a prior art arrangement for providing secure access. A user **401** makes a request, as depicted by an arrow **402**, directed to a code entry module **403**. The module **403** is typically mounted on the external jamb of a secure door. The request **402** is typically a secure code of some type which is compatible with the code entry module **403**. Thus, for example, the request **402** can be a sequence of secret numbers directed to a keypad **403**. Alternately, the request **402** can be a biometric signal from the user **401** directed to a corresponding biometric sensor **403**. One example of a biometric signal is a fingerprint. Other physical attributes that can be used to provide biometric signals include voice, retinal or iris pattern, face pattern, palm configuration and so on.

The code entry module **403** conveys the request **402** by sending a corresponding signal, as depicted by an arrow **404**, to a controller **405** which is typically situated in a remote or inaccessible place. The controller **405** authenticates the security information provided by the user **401** by interrogating a database **407** as depicted by an arrow **406**. If the user **401** is authenticated, and has the appropriate access privileges, then the controller **405** sends an access signal, as depicted by an arrow **408**, to a device **409** in order to provide the desired access. The device **409** can, for example, be the locking mechanism of a secure door, or can be an electronic lock on a personal computer (PC) which the user **401** desires to access.

A proximity card can also be used to emit the request **402**, in which case the code entry module **403** has appropriate functionality.

Although the request **402** can be made secure, either by increasing the number of secret digits or by using a biometric system, the communication infrastructure in FIG. 1 is typically less secure. The infrastructure **400** is generally hardwired, with the code entry module **403** generally being mounted on the outside jamb of a secured door. In such a situation, the signal path **404** can be over a significant distance in order to reach the controller **405**. The path **404** represents one weak point in the security system **400**, providing an unauthorised person with relatively easy access to the information being transmitted between the code entry module **403** and the controller **405**. Such an unauthorised person can, given this physical access, decipher the communicated information between the code entry module **403** and the controller **405**. This captured information can be deciphered, replayed in order to gain the access which rightfully belongs to the user **401**, or to enable modification for other subversive purposes.

2

Current systems as depicted in FIG. 1 utilise a communication protocol called “Wiegand” for communication between the code entry module **403** and the controller **405**. The Wiegand protocol is a simple one-way data protocol that can be modified by increasing or decreasing the bit count to ensure uniqueness of the protocol among different security companies. The Wiegand protocol does not secure the information being sent between the code entry module **403** and the controller **405**.

More advanced protocols such as RS 485 have been used in order to overcome the vulnerability of the Wiegand protocol over the long distance route **404**. RS 485 is a duplex protocol offering encryption capabilities at both the transmitting and receiving ends, i.e. the code entry module **403** and the controller **405** respectively in the present case. The length of the path **404** nonetheless provides an attack point for the unauthorised person.

Due to the cost and complexity of re-wiring buildings and facilities, security companies often make use of existing communication cabling when installing and/or upgraded security systems, thereby maintaining the vulnerability described above.

**SUMMARY**

It is an object of the present invention to substantially overcome, or at least ameliorate, one or more disadvantages of existing arrangements.

According to a first aspect of the present invention, there is provided a system for providing secure access to a controlled item, the system comprising:

a database of biometric signatures;

a transmitter subsystem comprising: a biometric sensor for receiving a biometric signal; means for matching the biometric signal against members of the database of biometric signatures to thereby output an accessibility attribute; and means for emitting a secure access signal conveying information dependent upon said accessibility attribute, wherein the secure access signal comprises one of at least a rolling code, an encrypted Bluetooth™ protocol, and a WiFi™ protocol; and

a receiver sub-system comprising: means for receiving the transmitted secure access signal; and means for providing conditional access to the controlled item dependent upon said information.

According to another aspect of the present invention, there is provided a transmitter sub-system for operating in a system for providing secure access to a controlled item, the system comprising a database of biometric signatures, a receiver sub-system comprising means for receiving a secure access signal transmitted by the transmitter sub-system, and means for providing conditional access to the controlled item dependent upon information conveyed in the secure access signal; wherein the transmitter subsystem comprises: a biometric sensor for receiving a biometric signal; means for matching the biometric signal against members of the database of biometric signatures to thereby output an accessibility attribute; and means for emitting the secure access signal conveying said information dependent upon said accessibility attribute, wherein the secure access signal comprises one of at least a rolling code, an encrypted Bluetooth™ protocol, and a WiFi™ protocol.

According to another aspect of the present invention, there is provided receiver sub-system for operating in a system for providing secure access to a controlled item, the system comprising a database of biometric signatures, a transmitter subsystem comprising a biometric sensor for

US 9,665,705 B2

3

receiving a biometric signal, means for matching the biometric signal against members of the database of biometric signatures to thereby output an accessibility attribute, and means for emitting a secure access signal conveying information dependent upon said accessibility attribute, wherein the secure access signal comprises one of at least a rolling code, an encrypted Bluetooth™ protocol, and a WiFi™ protocol; wherein the receiver sub-system comprises; means for receiving the transmitted secure access signal; and means for providing conditional access to the controlled item dependent upon said information.

According to another aspect of the present invention, there is provided a method for providing secure access to a controlled item, the method comprising the steps of:

receiving a biometric signal;

matching the biometric signal against members of a database of biometric signatures to thereby output an accessibility attribute;

emitting a secure access signal conveying information dependent upon said accessibility attribute, wherein the secure access signal comprises one of at least a rolling code, an encrypted Bluetooth™ protocol, and a WiFi™ protocol; and

providing conditional access to the controlled item dependent upon said information.

According to another aspect of the present invention, there is provided a method for populating a database of biometric signatures in a system for providing secure access to a controlled item, the system comprising said database of biometric signatures, a transmitter subsystem comprising a biometric sensor for receiving a biometric signal, and means for emitting a secure access signal, and a receiver subsystem comprising means for receiving the transmitted secure access signal, and means for providing conditional access to the controlled item dependent upon information in said secure access signal, said method comprising the steps of:

receiving a series of entries of the biometric signal;

determining at least one of the number of said entries and a duration of each said entry;

mapping said series into an instruction; and

populating the database according to the instruction.

According to another aspect of the present invention, there is provided a method for transmitting a secure access signal in a system for providing secure access to a controlled item, the system comprising a database of biometric signatures, a receiver sub-system comprising means for receiving the secure access signal transmitted by a transmitter sub-system, and means for providing conditional access to the controlled item dependent upon information conveyed in the secure access signal, said method comprising the steps of: receiving a biometric sensor by biometric signal; matching the biometric signal against members of the database of biometric signatures to thereby output an accessibility attribute; and emitting the secure access signal conveying said information dependent upon said accessibility attribute, wherein the secure access signal comprises one of at least a rolling code, an encrypted Bluetooth™ protocol, and a WiFi™ protocol.

According to another aspect of the present invention, there is provided a method for receiving a secure access signal in a system for providing secure access to a controlled item, the system comprising a database of biometric signatures, a transmitter subsystem comprising a biometric sensor for receiving a biometric signal, means for matching the biometric signal against members of the database of biometric signatures to thereby output an accessibility attribute,

4

and means for emitting a secure access signal conveying information dependent upon said accessibility attribute, wherein the secure access signal comprises one of at least a rolling code, an encrypted Bluetooth™ protocol, and a WiFi™ protocol, said method comprising the steps of:

receiving the transmitted secure access signal; and providing conditional access to the controlled item dependent upon said information.

According to another aspect of the present invention, there is provided a computer program product having a computer readable medium having a computer program recorded therein for directing a processor to provide secure access to a controlled item, said computer program product comprising:

code for receiving a biometric signal;

code for matching the biometric signal against members of a database of biometric signatures to thereby output an accessibility attribute;

code for emitting a secure access signal conveying information dependent upon said accessibility attribute, wherein the secure access signal comprises one of at least a rolling code, an encrypted Bluetooth™ protocol, and a WiFi™ protocol; and

code for providing conditional access to the controlled item dependent upon said information.

According to another aspect of the present invention, there is provided a computer program product having a computer readable medium having a computer program recorded therein for directing a processor to populate a database of biometric signatures in a system for providing secure access to a controlled item, said computer program product comprising:

code for receiving a series of entries of the biometric signal;

code for determining at least one of the number of said entries and a duration of each said entry;

code for mapping said series into an instruction; and

code for populating the database according to the instruction.

According to another aspect of the present invention, there is provided a computer program product having a computer readable medium having a computer program recorded therein for directing a processor to transmit a secure access signal in a system for providing secure access to a controlled item, said computer program product comprising:

code for receiving a biometric sensor by biometric signal;

code for matching the biometric signal against members of the database of biometric signatures to thereby output an accessibility attribute; and

code for emitting the secure access signal conveying said information dependent upon said accessibility attribute, wherein the secure access signal comprises one of at least a rolling code, an encrypted Bluetooth™ protocol, and a WiFi™ protocol.

According to another aspect of the present invention, there is provided a computer program product having a computer readable medium having a computer program recorded therein for directing a processor to receive a secure access signal in a system for providing secure access to a controlled item, said computer program product comprising:

code for receiving the transmitted secure access signal;

and  
code for providing conditional access to the controlled item dependent upon said information.



US 9,665,705 B2

5

According to another aspect of the present invention, there is provided a system for providing secure access, the system comprising:

- a biometric sensor for authenticating the identity of a user;
- a transmitter for transmitting information using a secure wireless signal dependent upon a request from the user and the authentication of the user identity; and
- a control panel for receiving the information and for providing the secure access requested.

Other aspects of the invention are also disclosed.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Some aspects of the prior art and one or more embodiments of the present invention are described with reference to the drawings, in which:

FIG. 1 shows a prior art arrangement for providing secure access;

FIG. 2 is a functional block diagram of an arrangement for providing secure access according to the present disclosure;

FIG. 3 shows an example of a method of operation of the remote control module of FIG. 2;

FIG. 4 shows an example of a method of operation of the (fixed) control device of FIG. 2;

FIG. 5 shows incorporation of a protocol converter into the arrangement of FIG. 2; and

FIG. 6 shows another example of how the remote access system operates;

FIG. 7 shows an access process relating to the example of FIG. 6;

FIG. 8 shows one enrollment process relating to the example of FIG. 6;

FIG. 9 shows another enrollment process relating to the example of FIG. 6; and

FIG. 10 is a schematic block diagram of the system in FIG. 2.

#### DETAILED DESCRIPTION INCLUDING BEST MODE

It is to be noted that the discussions contained in the "Background" section relating to prior art arrangements relate to discussions of documents or devices which form public knowledge through their respective publication and/or use. Such should not be interpreted as a representation by the present inventor(s) or patent applicant that such documents or devices in any way form part of the common general knowledge in the art.

Where reference is made in any one or more of the accompanying drawings to steps and/or features, which have the same reference numerals, those steps and/or features have for the purposes of this description the same function(s) or operation(s), unless the contrary intention appears.

FIG. 2 is a functional block diagram of an arrangement for providing secure access according to the present disclosure. A user **101** makes a request, as depicted by an arrow **102**, to a code entry module **103**. The code entry module **103** includes a biometric sensor **121** and the request **102** takes a form which corresponds to the nature of the sensor **121** in the module **103**. Thus, for example, if the biometric sensor **121** in the code entry module **103** is a fingerprint sensor, then the request **102** typically takes the form of a thumb press on a sensor panel (not shown) on the code entry module **103**.

The code entry module **103** interrogates, as depicted by an arrow **104**, a user identity database **105**. Thus for example if the request **102** is the thumb press on the biometric sensor panel **121** then the user database **105** contains biometric

6

signatures for authorised users against which the request **102** can be authenticated. If the identity of the user **101** is authenticated successfully, then the code entry module **103** sends a signal **106** to a controller/transmitter **107**. The controller/transmitter **107** checks, as depicted by an arrow **112**, the current rolling code in a database **113**. The controller **107** then updates the code and sends the updated code, this being referred to as an access signal, as depicted by an arrow **108** to a controller **109**. The rolling code protocol offers non-replay encrypted communication.

The controller **109** tests the rolling code received in the access signal **108** against the most recent rolling code which has been stored in a database **115**, this testing being depicted by an arrow **114**. If the incoming rolling code forming the access signal **108** is found to be legitimate, then the controller **109** sends a command, as depicted by an arrow **110**, to a controlled item **111**. The controlled item **111** can be a door locking mechanism on a secure door, or an electronic key circuit in a personal computer (PC) that is to be accessed by the user **101**. It is noted that the controller **109** contains a receiver **118** that receives the transmitted access signal **108** and converts it into a form that is provided, as depicted by an arrow **120**, into a form that the controller **109** can use.

The code entry module **103** also incorporates at least one mechanism for providing feedback to the user **101**. This mechanism can, for example, take the form of one or more Light Emitting Diodes (LEDs) **122** which can provide visual feedback, depicted by an arrow **123** to the user **101**. Alternately or in addition the mechanism can take the form of an audio signal provided by an audio transducer **124** providing audio feedback **125**.

The arrangement in FIG. 2 has been described for the case in which the secure code in the access signal **108** used between the sub-systems **116** and **117** is based upon the rolling code. It is noted that this is merely one arrangement, and other secure codes can equally be used. Thus, for example, either of the Bluetooth™ protocol, or the Wi Fi™ protocols can be used.

Rolling codes provide a substantially non-replayable non-repeatable and encrypted radio frequency data communications scheme for secure messaging. These codes use inherently secure protocols and serial number ciphering techniques which in the present disclosure hide the clear text values required for authentication between the key fob (transmitter) sub-system **116** and the receiver/controller **118/109**.

Rolling codes use a different code variant each time the transmission of the access signal **108** occurs. This is achieved by encrypting the data from the controller **107** with a mathematical algorithm, and ensuring that successive transmissions of the access signal **108** are modified using a code and/or a look-up table known to both the transmitter sub-system **116** and the receiver sub-system **117**. Using this approach successive transmissions are modified, resulting in a non-repeatable data transfer, even if the information from the controller **107** remains the same. The modification of the code in the access signal **108** for each transmission significantly reduces the likelihood that an intruder can access the information replay the information to thereby gain entry at some later time.

The sub-system in FIG. 2 falling to the left hand side, as depicted by an arrow **116**, of a dashed line **119** can be implemented in a number of different forms. The sub-system **116** can for example be incorporated into a remote fob (which is a small portable device carried by the user **101**), or alternately can be mounted in a protected enclosure on the outside jamb of a secured door. The sub-system **116** com-



US 9,665,705 B2

7

municates with the sub-system 117 on the right hand side of the dashed line 119 via the wireless communication channel used by the access signal 108. The sub-system 117 is typically located in an inaccessible area such as a hidden roof space or alternately in a suitable protected area such as an armoured cupboard. The location of the sub-system 117 must of course be consistent with reliable reception of the wireless access signal 108.

Although typically the communication channel uses a wireless transmission medium, there are instances where the channel used by the access signal 108 can use a wired medium. This is particularly the case when the transmitter sub-system 116 is mounted in an enclosure on the door jamb rather than in a portable key fob.

The biometric signature database 105 is shown in FIG. 2 to be part of the transmitter sub-system 116. However, in an alternate arrangement, the biometric signature database 105 can be located in the receiver sub-system 117, in which case the communication 104 between the code entry module 103 and the signature database 105 can also be performed over a secure wireless communication channel such as the one used by the access signal 108. In the event that the secure access system is being applied to providing secure access to a PC, then the secured PC can store the biometric signature of the authorised user in internal memory, and the PC can be integrated into the receiver sub-system 117 of FIG. 1.

In the event that the sub-system 116 is implemented as a remote fob, the combination of the biometric verification and the strongly encrypted wireless communication provides a particularly significant advantage over current systems. The remote key fob arrangement allows easy installation, since the wired communication path 404 (see FIG. 1) is avoided. Other existing wiring elements of the present systems 400 can be used where appropriate. When the sub-system 116 is implemented as a remote fob, the fob incorporates the biometric (eg fingerprint) authentication arrangement, in which case only one biometric signature is stored in the fob. This arrangement reduces the requirements on the central database 115. Once the key fob authenticates the user through biometric signature (eg fingerprint) verification, the rolling code in the access signal 108 is transmitted to the controller 109 for authorisation of the user for that location at that time.

In addition to authenticating the user 101 the biometric sensor 121 in the code entry module 103 in conjunction with the controller 107 can also check other access privileges of the user 101. These access privileges can be contained in the database 105 which can be located either locally in the remote key fob, or in the receiver sub-system 117 as previously described. In one example, Tom Smith can firstly be authenticated as Tom Smith using the thumb press by Tom on the biometric sensor panel (not shown). After Tom's personal biometric identity is authenticated, the transmitter sub-system 116 can check if Tom Smith is in fact allowed to use the particular door secured by the device 111 on weekends. Thus the security screening offered by the described arrangement can range from simple authentication of the user's identity, to more comprehensive access privilege screening.

The incorporation of the biometric sensor 121 into the code entry module 103 in the form of a remote key fob also means that if the user 101 loses the remote key fob, the user need not be concerned that someone else can use it. Since the finder of the lost key fob will not be able to have his or her biometric signal authenticated by the biometric sensor 121 in the code entry module 103, the lost key fob is useless to anyone apart from the rightful user 101.

8

The transmitter sub-system 116 is preferably fabricated in the form of a single integrated circuit (IC) to reduce the possibility of an authorised person bypassing the biometric sensor 121 in the code entry module 103 and directly forcing the controller 107 to emit the rolling code access signal 108.

FIG. 3 shows the method of operation of the remote control module (i.e. the sub-system 116) of FIG. 2. The method 200 commences with a testing step 201 in which the biometric sensor 121 in the code entry module 103 checks whether a biometric signal 102 is being received. If this is not the case, then the method 200 is directed in accordance with an NO arrow back to the step 201 in a loop. If, on the other hand, the biometric signal 102 has been received, then the method 200 is directed in accordance with a YES arrow to a step 202. The step 202 compares the received biometric signal 102 with information in the biometric signature database 105 in order to ensure that the biometric signal received 102 is that of the rightful user 101 of the sub-system 116.

A subsequent testing step 203 checks whether the comparison in the step 202 yields the desired authentication. If the biometric signature matching is authenticated, then the process 200 is directed in accordance with a YES arrow to a step 204. The authentication of the biometric signature matching produces an accessibility attribute for the biometric signal 102 in question. The accessibility attribute establishes whether and under which conditions access to the controlled item 111 should be granted to a user. Thus, for example, the accessibility attribute may comprise one or more of an access attribute (granting unconditional access), a duress attribute (granting access but with activation of an alert tone to advise authorities of the duress situation), an alert attribute (sounding a chime indicating that an unauthorised, but not necessarily hostile, person is seeking access, and a telemetry attribute, which represents a communication channel for communicating state information for the transmitter sub-system to the receiver sub-system such as a "low battery" condition. The step 204 enables the user 101 to select a control option by providing one or more additional signals (not shown) to the controller 107. Thus for example the control option could enable the user 101 to access one of a number of secure doors after his or her identity has been authenticated in the step 203. In the subsequent step 205 the controller 107 sends the appropriate access signal 108 to the controller 109. The process 200 is then directed in accordance with an arrow 206 back to the step 201.

Thus for example the sub-system 116 can be provided with a single biometric sensor 121 in the code entry module 103 which enables the user 101 to select one of four door entry control signals by means of separate buttons on the controller 107 (not shown). This would enable the user 101, after authentication by the biometric sensor 121 in the code entry module 103 and the controller 107 to obtain access to any one of the aforementioned for secure doors.

Returning to the testing step 203, if the signature comparison indicates that the biometric signal 102 is not authentic, and has thus not been received from the proper user, then the process 200 is directed in accordance with a NO arrow back to the step 201. In an alternate arrangement, the NO arrow from the step 203 could lead to a disabling step which would disable further operation of the sub-system 116, either immediately upon receipt of the incorrect biometric signal 102, or after a number of attempts to provide the correct biometric signal 102.

FIG. 4 shows the method of operation of the control sub-system 117 of FIG. 2. The method 300 commences with

US 9,665,705 B2

9

a testing step 301 which continuously checks whether the access signal 108 has been received from 107. The step 301 is performed by the controller 109. As long as the access signal 108 is not received the process 300 is directed in accordance with a NO arrow in a looping manner back to the step 301. When the access signal 108 is received, the process 300 is directed from the step 301 by means of a YES arrow to a step 302. In the step 302, the controller 109 compares the rolling code received by means of the access signal 108 with a reference code in the database 115. A subsequent testing step 303 is performed by the controller 109. In the step 303 if the code received on the access signal 108 is successfully matched against the reference code in the database 115 then the process 300 is directed in accordance with a YES arrow to a step 304.

In the step 304 the controller 109 sends the control signal 110 to the controlled item 111 (for example opening the secured door). The process 300 is then directed from the step 304 as depicted by an arrow 305 back to the step 301. Returning to the testing step 303 if the code received on the access signal 108 is not successfully matched against the reference code in the database 115 by the controller 109 then the process 300 is directed from the step 303 in accordance with a NO arrow back to the step 301.

As was described in regard to FIG. 3, in an alternate arrangement, the process 300 could be directed, if the code match is negative, from the step 303 to a disabling step which would disable the sub-system 117 if the incorrect code were received once or a number of times.

FIG. 5 shows incorporation of a protocol converter into the arrangement of FIG. 2. In the arrangement of FIG. 2 the receiver 118 in the controller 109 is able to directly receive and process the rolling code in the access signal 108 in a manner as to provide, as depicted by the arrow 120, the necessary information to the controller 109. FIG. 5 shows how an existing controller depicted by a reference numeral 109' that uses Wiegand input signalling can be used in the disclosed arrangement when alarm systems are upgraded. FIG. 5 shows how the incoming access signal 108 is received by a receiver 118' as is the case in FIG. 2. In FIG. 5 however the receiver 118' provides, as depicted by an arrow 503, the received rolling code from the access signal 108 to a rolling code/Wiegand protocol converter 501. The converter 501 converts, as depicted by an arrow 504, the incoming rolling code 503 to a form that can be used by the controller 109' that is designed to handle Wiegand protocol incoming signals. Therefore, the converted incoming signal 504 is in the Wiegand format.

The converter 501 uses a microprocessor-based arrangement running software code to process the incoming rolling code information 503 and decode this information 503 to clear text form. The converter 501 converts this clear text to a Wiegand variable bit-length data stream. In FIG. 2, the receiver 118 performs the conversion of the incoming rolling code access signal 108 to clear text which enables the controller 109 to identify the serial number of the originating key fob sub-system 116 to enable the access rights of the user to be verified.

Further to the Wiegand conversion arrangement, the protocol converter 501 approach can be adapted to convert between the incoming rolling code 503 (or any other appropriate secure code) to any other convenient protocol used by the controller 169'.

The advantage of the rolling code/Wiegand converter 501 is that security system upgrades can be made without replacing Wiegand compatible controller 109'. Accordingly, existing systems as are described in FIG. 1 can be upgraded

10

by replacing the code entry module 403 and the transmission path 404, leaving the other components of the system 400 (i.e., the controller 405, the code database 407, and the controlled item 409, together with existing wiring 408 and 406), largely intact. Minor modifications might however be necessary. When upgrading systems in this manner, the sub-system 116 can either be used in a remote fob configuration, or can be placed in a secure housing on an external door jamb.

From a practical perspective, incorporating the protocol converter 501 into an existing controller 109' would require direct wiring of the converter 501 into the housing of the secure controller 109'.

FIG. 6 shows another process 700 of operation of the remote access system. The process 700 commences with a step 701 that determines if a biometric signal has been received by the biometric sensor 121 in the code entry module in FIG. 2. If not, then the process 700 follows a NO arrow back to the step 701. If however a biometric signal has been received, then the process 700 follows a YES arrow to a step 702 that determines if the user ID database 105 in FIG. 2 is empty. This would be the case, for example, if the code entry module is new and has never been used, or if the user 101 has erased all the information in the database 105.

If the database 105 is empty, then the process 700 is directed by an arrow 703 to 706 in FIG. 8 which depicts a process 800 dealing with the enrollment or the administration function for loading relevant signatures into the database 105. If on the other hand the database 105 is not empty, then the process 700 is directed to a step 704 that determines if the biometric signal that has been received is an administrator's biometric signal.

The disclosed remote entry system can accommodate at least three classes of user, namely administrators, (ordinary) users, and duress users. The administrators have the ability to amend data stored, for example, in the database 105, while the ordinary users do not have this capability. The first user of the code entry module 103, whether this is the user who purchases the module, or the user who programs the module 103 after all data has been erased from the database 105, is automatically categorised as an administrator. This first administrator can direct the system 100 to either accept further administrators, or alternately to only accept further ordinary users.

Although the present description refers to "Users", in fact it is "fingers" which are the operative entities in system operation when the biometric sensor 121 (see FIG. 2) is a fingerprint sensor. In this event, a single user can enroll two or more of his or her own fingers as separate administrators or (ordinary) users of the system, by storing corresponding fingerprints for corresponding fingers in the database 105 via the enrollment process 800 (see FIG. 8).

Some class overlap is possible. Thus a stored signature can belong to an administrator in the duress class.

The first administrator can provide control information to the code entry module by providing a succession of finger presses to the biometric sensor 121, providing that these successive presses are of the appropriate duration, the appropriate quantity, and are input within a predetermined time. In one arrangement, the control information is encoded by either or both (a) the number of finger presses and (b) the relative duration of the finger presses. If the successive finger presses are provided within this predetermined time, then the controller 107 accepts the presses as potential control information and checks the input information against a stored set of legal control signals.

US 9,665,705 B2

11

One example of a legal control signal can be expressed as follows:

“Enroll an ordinary user”→dit, dit, dit, dah where “dit” is a finger press of one second’s duration (provided by the user **101** in response to the feedback provided by the Amber LED as described below), and “dah” is a finger press of two second’s duration.

In the event that a legitimate sequence of finger presses are not delivered within the predetermined time, then the presses are considered not to be control information and merely to be presses intended to provide access to the controlled item **111**. Legitimate control sequences are defined in Read Only Memory (ROM) in the controller **107**.

The code entry module **103** has feedback signalling mechanisms **122**, implemented for example by a number of LEDs, and **124**, implemented by an audio transducer. The LEDs **122** and the audio transducer **124** are used by the controller to signal the state of the code entry module **103** to the user **101**, and to direct the administration process. Thus, in one example, three LEDs, being Red, Amber and Green are provided.

When the Amber LED is flashing, it means “Press the sensor”. When the Amber LED is steady ON, it means “Maintain finger pressure”. When the Amber LED is OFF, it means “Remove finger pressure”. When the system enters the enrollment state (depicted by the process **800** in FIG. **8**), then the audio transducer **124** emits the “begin enrollment” signal (dit dit dit dit) and the Red LED flashes. Enrollment of a normal user (according to the step **807** in FIG. **8**) is signaled by the OK audio signal (dit dit) and a single blink of the Green LED.

Returning to the step **704**, if the step determines that the biometric signal received is an administrator’s signal, then the process **700** is directed by a YES arrow to **706** in FIG. **8** as depicted by the arrow **703**. If on the other hand, the step **704** indicates that the received biometric signal does not belong to an administrator then the process **700** is directed by a NO arrow to **707** in FIG. **7**.

FIG. **7** shows the access process **600** by which a biometric signal **102** (see FIG. **2**) is processed in order to provide access to the controlled item **111**, or to take other action. Entering the process at **707** from FIG. **6**, the process **600** proceeds to a step **602** that compares the received biometric signature to signatures stored in the database **105**. A following step **603** determines if the received signal falls into the “duress” category. Signatures in this category indicate that the user **101** is in a coercive situation where, for example, an armed criminal is forcing the user **101** to access the secure facility (such as a bank door). If the step **603** determines that the signature is in the duress class, then a following step **604** prepares a “duress” bit for incorporation into the code access signal **108**. The aforementioned duress bit is an access attribute of the biometric signal **102**. Thereafter the process **600** proceeds to a step **605**.

Modules used in the code entry module for producing the rolling code enable a number of user defined bits to be inserted into the access signal **108**, and these bits can be used to effect desired control functions in the receiver sub-system **117**. The disclosed system **100** utilises four such user bits, namely (a) to indicate that the user belongs to the duress category, (b) to indicate a “battery low” condition, or other desired system state or “telemetry” variable, for the code entry module **103**, (c) to indicate that the biometric signal represents a legitimate user in which case the secure access to the controlled item **111** is to be granted, or (d) to indicate that the biometric signal is unknown, in which case the

12

controller **109** in the receiver sub-system **117** sounds an alert tone using a bell (not shown) or the like.

Returning to FIG. **7**, if the step **603** determines that the biometric signal is not in the duress class, then the process **600** proceeds according to a NO arrow to the step **605**. The step **605** determines if the code entry module **103** has a low battery condition, in which event the process **600** proceeds according to a YES arrow to a step **606** that prepares a telemetry bit for insertion into the access signal **108**. The aforementioned telemetry bit is an access attribute of the biometric signal **102**. Thereafter, the process proceeds to a step **607**.

If the step **605** determines that telemetry signalling is not required, then the process **600** proceeds according to a NO arrow to the step **607**. The step **607** checks the biometric signal against the signatures in the database **105**. If the received biometric signal matches a legitimate signature in the database **105**, then the process is directed to a step **608** that prepares an “access” bit for insertion into the access signal **108**. This access bit directs the controller **109** in the receiver sub-system **117** to provide access to the controlled item **111**. The aforementioned access bit is an access attribute of the biometric signal **102**. The process **600** then proceeds to a step **610**.

If the step **607** determines that the biometric input signal does not match any legitimate signatures in the database **105**, then the process **600** proceeds according to a NO arrow to a step **609** that prepares an “alert” bit for insertion into the access signal **108**. The aforementioned alert bit is an access attribute of the biometric signal **102**. This alert bit directs the controller **109** (a) not to provide access to the controlled item **111**, and (b) to provide an alert tone, like ringing a chime or a bell (not shown), to alert personnel in the vicinity of the receiver sub-system **117** that an unauthorised user is attempting to gain access to the controlled item **111**. The alert bit can also cause a camera mounted near the controlled item **111** to photograph the unauthorised user for later identification of that person. The camera can be activated if the person attempting to gain access is unauthorised, and also if the person attempting to gain access is authorised but uses a duress signature.

An optional additional step (not shown) can prepare an identification field for insertion into the access signal **108**. This sends, to the receiver sub-system **117**, ID information that the receiver sub-system can use to construct an audit trail listing which users, having signatures in the database **105**, have been provided with access to the controlled item **111**.

The process **600** is then directed to the step **610** which inserts the various user defined bits into the access signal **108** and sends the signal **108** to the receiver sub-system **117**. Thereafter, the process **600** is directed by an arrow **611** to **705** in FIG. **6**.

FIG. **8** shows a process **800** for implementing various enrollment procedures. The process **800** commences at **706** from FIG. **6** after which a step **801** determines if the biometric signal is a first administrator’s input (which is the case if the database **105** is empty). If this is the case, then the process **800** is directed to a step **802** that stores the administrator’s signature in the database **105**. From a terminology perspective, this first administrator, or rather the first administrator’s first finger (in the event that the biometric sensor **121** in FIG. **2** is a fingerprint sensor), is referred to as the “superfinger”. Further administrator’s fingers are referred to as admin-fingers, and ordinary users fingers are referred to merely as “fingers”. The reason that someone would enroll more than one of their own fingers into the system is to



US 9,665,705 B2

13

ensure that even in the event that one of their enrolled fingers is injured, the person can still operate the system using another enrolled finger.

It is noted that the step 802, as well as the steps 805, 807 and 809 involve sequences of finger presses on the biometric sensor 121 in conjunction with feedback signals from the LEDs 122 and/or the audio speaker 124. The process 800 then proceeds to a step 810 that determines if further enrollment procedures are required. If this is the case, then the process 800 proceeds by a YES arrow back to the step 801. If no further enrollment procedures are required, then the process 800 proceeds by a NO arrow to 705 in FIG. 6.

Returning to the step 801, if the biometric signal is not a first administrator's signal, then the process 800 proceeds by a NO arrow to a step 803. The step 803 determines if a further administrator signature is to be stored. It is noted that all signatures stored in the database are tagged as belonging to one or more of the classes of administrator, ordinary user, and duress users. If a further administrator signature is to be stored, then the process 800 proceeds by a YES arrow to the step 802 that stores the biometric signal as a further administrator's signature.

If a further administrator's signature is not required, then the process 800 proceeds according to a NO arrow to a step 804 that determines if a duress signature is to be stored. If this is the case then the process 800 follows a YES arrow to a step 805 that stores a duress signature. The process 800 then proceeds to the step 810. If however the step 804 determines that a duress signature is not required, then the process 800 proceeds by a NO arrow to a step 806.

The step 806 determines if a further simple signature (i.e. belonging to an ordinary user) is to be stored. If a further simple signature is to be stored, then the process 800 proceeds by a YES arrow to the step 807 that stores the biometric signal as a further ordinary signature.

If a further simple signature is not required, then the process 800 proceeds according to a NO arrow to a step 808 that determines if any or all signatures are to be erased from the database 105. If this is the case then the process 800 follows a YES arrow to a step 809 that erases the desired signatures. The process 800 then proceeds to the step 810. If however the step 804 determines that no signatures are to be erased, then the process 800 proceeds by a NO arrow to the step 810.

FIG. 9 shows another enrollment process relating to the example of FIG. 6. The process 900 commences at 706 from FIG. 6 after which a step 901 determines if the received biometric signal comes from the first administrator. If this is the case, then the process 900 proceeds according to a YES arrow to a step 902. The step 902 emits an "Enrollment" tone and flashes the green LED once only. Thereafter, a step 905 reads the incoming biometric signal which is provided by the user as directed by the Amber LED. When the Amber LED flashes continuously, this directs the user to "Apply Finger". When the Amber LED is in a steady illuminated state, this directs the user to "Maintain Finger Pressure". Finally, when the amber LED is off, this directs the user to "Remove Finger".

Returning to the step 901, if the incoming biometric signal does not belong to the first administrator, then the process 900 proceeds according to a NO arrow to a step 903. The step 903 emits an "Enrollment" tone, and flashes the Red LED in an on-going fashion. Thereafter, the process 900 proceeds according to an arrow 904 to the step 905.

Following the step 905, a step 906 determines whether the incoming biometric signal is legible. If this is not the case, then the process 900 proceeds according to a NO arrow to

14

a step 907. The step 907 emits a "Rejection" tone, after which the process 900 is directed, according to an arrow 908 to 705 in FIG. 6. Returning to the step 906, if the incoming biometric signal is legible, then the process 900 follows a YES arrow to a step 909. The step 909 determines whether the finger press exceeds a predetermined time. If this is not the case, then the process 900 follows a NO arrow to a step 910 which stores the biometric signal, which in the present case is a fingerprint signature. Thereafter the process 900 follows an arrow 911 to 705 in FIG. 6.

Returning to the step 909 if the finger press does exceed the predetermined period, then the process follows a YES arrow to a step 912. The step 912 erases relevant signatures depending upon the attributes of the incoming biometric signal. Thus, for example, if the incoming biometric signal belongs to an ordinary user, then the ordinary user's signature in the database 105 is erased by the step 912. If, on the other hand, the incoming biometric signal belongs to the first administrator, then all the signatures in the database 105 are erased. Administrators who are not the first administrator can be granted either the same powers as the first administrator in regard to erasure of signatures, or can be granted the same powers as ordinary user in this respect.

Once the step 912 has completed erasure of the relevant signatures, then the process 900 follows an arrow 913 to 705 in FIG. 6.

FIG. 10 is a schematic block diagram of the system in FIG. 2. The disclosed secure access methods are preferably practiced using a computer system arrangement 100', such as that shown in FIG. 10 wherein the processes of FIGS. 3-4, and 6-9 may be implemented as software, such as application program modules executing within the computer system 100'. In particular, the method steps for providing secure access are effected by instructions in the software that are carried out under direction of the respective processor modules 107 and 109 in the transmitter and receiver sub-systems 116 and 117. The instructions may be formed as one or more code modules, each for performing one or more particular tasks. The software may also be divided into two separate parts, in which a first part performs the provision of secure access methods and a second part manages a user interface between the first part and the user. The software may be stored in a computer readable medium, including the storage devices described below, for example. The software is loaded into the transmitter and receiver sub-systems 116 and 117 from the computer readable medium, and then executed under direction of the respective processor modules 107 and 109. A computer readable medium having such software or computer program recorded on it is a computer program product. The use of the computer program product in the computer preferably effects an advantageous apparatus for provision of secure access.

The following description is directed primarily to the transmitter sub-system 116, however the description applies in general to the operation of the receiver sub-system 117. The computer system 100' is formed, having regard to the transmitter sub-system 116, by the controller module 107, input devices such as the bio sensor 121, output devices including the LED display 122 and the audio device 124. A communication interface/transceiver 1008 is used by the controller module 107 for communicating to and from a communications network 1020. Although FIG. 2 shows the transmitter sub-system 116 communicating with the receiver sub-system 117 using a direct wireless link for the access signal 108, this link used by the access signal 108 can be effected over the network 1020 forming a tandem link comprising 108-1020-108'. The aforementioned communi-

US 9,665,705 B2

15

cations capability can be used to effect communications between the transmitter sub-system 116 and the receiver sub-system 117 either directly or via the Internet, and other network systems, such as a Local Area Network (LAN) or a Wide Area Network (WAN).

The controller module 107 typically includes at least one processor unit 1005, and a memory unit 1006, for example formed from semiconductor random access memory (RAM) and read only memory (ROM). The controller module 107 also includes an number of input/output (I/O) interfaces including an audio-video interface 1007 that couples to the LED display 122 and audio speaker 124, an I/O interface 1013 for the bio-sensor 121, and the interface 1008 for communications. The components 1007, 1008, 1005, 1013 and 1006 the controller module 107 typically communicate via an interconnected bus 1004 and in a manner which results in a conventional mode of operation of the controller 107 known to those in the relevant art.

Typically, the application program modules for the transmitter sub-system 116 are resident in the memory 1006 iROM, and are read and controlled in their execution by the processor 1005. Intermediate storage of the program and any data fetched from the bio sensor 121 and the network 1020 may be accomplished using the RAM in the semiconductor memory 1006. In some instances, the application program modules may be supplied to the user encoded into the ROM in the memory 1006. Still further, the software modules can also be loaded into the transmitter sub-system 116 from other computer readable media, say over the network 1020. The term "computer readable medium" as used herein refers to any storage or transmission medium that participates in providing instructions and/or data to the transmitter sub-system 116 for execution and/or processing. Examples of storage media include floppy disks, magnetic tape, CD-ROM, a hard disk drive, a ROM or integrated circuit, a magneto-optical disk, or a computer readable card such as a PCMCIA card and the like, whether or not such devices are internal or external of the transmitter sub-system 116. Examples of transmission media include radio or infra-red transmission channels as well as a network connection to another computer or networked device, and the Internet or Intranets including e-mail transmissions and information recorded on Websites and the like.

#### INDUSTRIAL APPLICABILITY

It is apparent from the above that the arrangements described are applicable to the security industry.

The foregoing describes only some embodiments of the present invention, and modifications and/or changes can be made thereto without departing from the scope and spirit of the invention, the embodiments being illustrative and not restrictive.

The system 100 can also be used to provide authorised access to lighting systems, building control devices, exterior or remote devices such as air compressors and so on. The concept of "secure access" is thus extendible beyond mere access to restricted physical areas.

The invention claimed is:

1. A system for providing secure access to a controlled item, the system comprising:
  - a memory comprising a database of biometric signatures;
  - a transmitter sub-system comprising:
    - a biometric sensor configured to receive a biometric signal;

16

- a transmitter sub-system controller configured to match the biometric signal against members of the database of biometric signatures to thereby output an accessibility attribute; and
  - a transmitter configured to emit a secure access signal conveying information dependent upon said accessibility attribute; and
  - a receiver sub-system comprising:
    - a receiver sub-system controller configured to:
      - receive the transmitted secure access signal; and
      - provide conditional access to the controlled item dependent upon said information;
- wherein the transmitter sub-system controller is further configured to:
- receive a series of entries of the biometric signal, said series being characterised according to at least one of the number of said entries and a duration of each said entry;
  - map said series into an instruction; and
  - populate the data base according to the instruction, wherein the controlled item is one of: a locking mechanism of a physical access structure or an electronic lock on an electronic computing device.
2. The system according to claim 1, wherein the transmitter sub-system controller is further configured to:
    - provide a signal for directing input of the series of entries of the biometric signal;
    - incorporate into the secure access signal an identification field identifying the biometric signal if the signal matches a member of the database; and
    - construct an audit trail of biometric signals provided to the biometric sensor in order to access the controlled item.
  3. The system according to claim 1, wherein the database of biometric signatures comprises signatures in at least one of a system administrator class, a system user class, and a duress class, the accessibility attribute comprising:
    - an access attribute if the biometric signal matches a member of the database of biometric signatures;
    - a duress attribute if the biometric signal matches a member of the database of biometric signatures and said member belongs to the duress class; and
    - an alert attribute if the biometric signal does not match a member of the database of biometric signatures.
  4. The system according to claim 1, wherein the biometric sensor is responsive to one of voice, retinal pattern, iris pattern, face pattern, and palm configuration, and/or the database of biometric signatures is located in at least one of the transmitter sub-system and the receiver sub-system.
  5. The system according to claim 1, wherein said conditional access comprises one of:
    - provision of access to the controlled item if the accessibility attribute comprises an access attribute;
    - provision of access to the controlled item and sounding of an alert if the accessibility attribute comprises a duress attribute; and
    - denial of access to the controlled item and sounding of an alert if the accessibility attribute comprises an alert attribute.
  6. The system as claimed in claim 1, wherein the biometric sensor is further configured to authenticate the identity of a user;
    - wherein the transmitter is further configured to transmit information capable of granting access to the controlled item using a secure wireless signal dependent upon a request from the user and the authentication of the user identity; and

US 9,665,705 B2

17

the system further comprising a control panel configured to receive the information and provide the secure access requested.

7. The system according to claim 6, wherein the control panel includes a converter configured to receive the secure wireless signal and output the information, and/or the biometric sensor is configured to authenticate the identity of the user by comparing a biometric input from the user with a biometric signature for the user in a biometric database, and/or the biometric sensor, the biometric database, and the transmitter are located in a remote fob.

8. The system according to claim 7, wherein the secure wireless signal comprises an RF carrier and a rolling code, and the converter converts the rolling code to the Wiegand protocol.

9. The system according to claim 1, wherein:

the transmitter sub-system and the receiver sub-system are collocated in the electronic computing device.

10. A transmitter sub-system for operating in a system for providing secure access to a controlled item, wherein the transmitter sub-system comprises:

a biometric sensor configured to receiving a biometric signal;

a controller configured to match the biometric signal against members of a database of biometric signatures to thereby output an accessibility attribute; and

a transmitter configured to emit a secure access signal conveying said information dependent upon said accessibility attribute;

wherein the controller is further configured to:

receive a series of entries of the biometric signal, said series being characterised according to at least one of the number of said entries and a duration of each said entry;

map said series into an instruction; and

populate the database according to the instruction, wherein the controlled item is one of: a locking mechanism of a physical access structure or an electronic lock on an electronic computing device.

11. A method for providing secure access to a controlled item in a system comprising a database of biometric signatures, a transmitter sub-system comprising a biometric sensor configured to receive a biometric signal, and a transmitter configured to emit a secure access signal capable of granting access to the controlled item, and a receiver sub-system comprising a receiver sub-system controller configured to receive the transmitted secure access signal, and provide conditional access to the controlled item dependent upon information in said secure access signal, the method comprising:

populating the database of biometric signatures by:

receiving a series of entries of the biometric signal;

determining at least one of the number of said entries and a duration of each said entry;

mapping said series into an instruction; and

populating the database according to the instruction;

receiving the biometric signal;

matching the biometric signal against members of the database of biometric signatures to thereby output an accessibility attribute;

emitting a secure access signal conveying information dependent upon said accessibility attribute; and

providing conditional access to the controlled item dependent upon said information, wherein the controlled item is one of: a locking mechanism of a physical access structure or an electronic lock on an electronic computing device.

18

12. The method according to claim 11, wherein populating the database of biometric signatures further comprises enrolling a biometric signature into the database of biometric signatures, and wherein enrolling the biometric signature into the database comprises:

receiving a biometric signal; and

enrolling the biometric signal as an administrator signature in response to the database of biometric signatures being empty.

13. The method according to claim 12, wherein enrolling the biometric signature further comprises receiving another biometric signal to confirm the enrolling of the biometric signal as an administrator signature, and wherein enrolling the biometric signature is dependent upon generation of a feedback signal adapted to direct provision of at least one of the biometric signal and the other biometric signal.

14. A non-transitory computer readable storage medium storing a computer program comprising instructions, which when executed by processors causes the processors to:

receive a series of entries of a biometric signal;

determine at least one of a number of said entries and a duration of each of said entries;

map said series into an instruction;

populate a database of biometric signatures according to the instruction;

receive the biometric signal;

match the biometric signal against members of the database of biometric signatures to thereby output an accessibility attribute;

emit a secure access signal conveying information dependent upon said accessibility attribute; and

provide conditional access to a controlled item dependent upon said information, wherein the controlled item is one of: a locking mechanism of a physical access structure or an electronic lock on an electronic computing device.

15. A system for providing secure access to a controlled item, the system comprising:

a memory comprising a database of biometric signatures;

a transmitter sub-system comprising:

a biometric sensor capable of receiving a biometric signal;

a transmitter sub-system controller capable of matching the biometric signal against members of the database of biometric signatures to thereby output an accessibility attribute; and

a transmitter capable of emitting a secure access signal conveying information dependent upon said accessibility attribute; and

a receiver sub-system comprising:

a receiver sub-system controller capable of:

receiving the transmitted secure access signal; and providing conditional access to the controlled item dependent upon said information;

wherein the transmitter sub-system controller is further capable of:

receiving a series of entries of the biometric signal, said series being characterised according to at least one of the number of said entries and a duration of each said entry;

mapping said series into an instruction; and

populating the data base according to the instruction, wherein the controlled item is one of: a locking mechanism of a physical access structure or an electronic lock on an electronic computing device.

## US 9,665,705 B2

19

16. A transmitter sub-system for operating in a system for providing secure access to a controlled item, wherein the transmitter sub-system comprises:

- a biometric sensor capable of receiving a biometric signal;
- a controller capable of matching the biometric signal against members of a database of biometric signatures to thereby output an accessibility attribute; and
- a transmitter capable of emitting a secure access signal conveying said information dependent upon said accessibility attribute;

wherein the controller is further capable of:

- receiving a series of entries of the biometric signal, said series being characterised according to at least one of the number of said entries and a duration of each said entry;
- mapping said series into an instruction; and
- populating the database according to the instruction, wherein the controlled item is one of: a locking mechanism of a physical access structure or an electronic lock on an electronic computing device.

17. A method for providing secure access to a controlled item in a system comprising a database of biometric signatures, a transmitter sub-system comprising a biometric sensor capable of receiving a biometric signal, and a transmitter capable of emitting a secure access signal capable of grant-

20

ing access to the controlled item, and a receiver sub-system comprising a receiver sub-system controller capable of receiving the transmitted secure access signal, and providing conditional access to the controlled item dependent upon information in said secure access signal, the method comprising:

populating the database of biometric signatures by:

- receiving a series of entries of the biometric signal;
- determining at least one of the number of said entries and a duration of each said entry;

mapping said series into an instruction; and

populating the database according to the instruction;

receiving the biometric signal;

matching the biometric signal against members of the database of biometric signatures to thereby output an accessibility attribute;

emitting a secure access signal conveying information dependent upon said accessibility attribute; and

providing conditional access to the controlled item dependent upon said information, wherein the controlled item is one of: a locking mechanism of a physical access structure or an electronic lock on an electronic computing device.

\* \* \* \* \*